iPad 7:39 AM 88%
acuitybrandslighting.com
Remir | The datcp.wi.g... MyDATCP... Stock Mar... 1969 MOO... 70 Watt H... TWS - Mini... www.ac...

LITHONIA LIGHTING®

Catalog Number	
Notes	Type

FEATURES & SPECIFICATIONS

INTENDED USE

For entrances, stairwells, corridors, other pedestrian areas.

CONSTRUCTION

Cast aluminum backplate on which electrical components are mounted for maximum heat-dissipation. Gasketing between backplate and front cover prevents the entry of water and contaminants. External hardware includes phillips head and tamper-proof hex-head fasteners.

FINISH

Dark bronze (DDB) or white (DWH) front cover available for all wattages.

OPTICAL SYSTEM

Front cover/refractor is injection-molded, one-piece, UV-stabilized polycarbonate. Optical system is sealed and gasketed to inhibit entrance of outside contaminants.

ELECTRICAL SYSTEM

35W-70W HPS and 50W MH use 120V normal power factor.

Porcelain, medium-base socket with copper alloy nickel-plated screw shell and center contact. UL listed 660W, 600V, 4KV pulse rated. Medium-base lamp included with the fixture.

INSTALLATION

Units are for wall mounting and include two 3/4" knockouts for routing electrical conduit.

LISTING

UL listed for wet locations. Listed and labeled to comply with Canadian Standards.

Small Polycarbonate Wall Pack

TWS

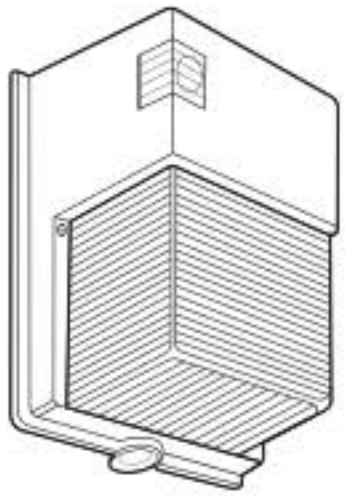

METAL HALIDE
50W
HIGH PRESSURE SODIUM
35W, 50W, 70W
8' to 12' Mounting

Specifications

Height: 11" (27.9cm)
Width: 6-1/2" (16.5cm)
Depth: 5-1/4" (13.3cm)
Weight: 4.9 lbs./2.2 kgs

ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold).**
Example: TWS 50M 120 PE LPI

TWS — Series: **TWS**

Wattage/lamp:
Metal halide
50M
High pressure sodium
35S
50S
70S

120 — Voltage: **120**

Options:
Shipped installed in fixture
PE Photoelectric cell as standard
LPI Lamp included as standard
Architectural colors (optional)
(blank) **Dark bronze**
DWH White

Accessories

Order as separate catalog numbers
RK1 PEB1 Photocell kit (120V only)
TWSWG Wireguard